


Wall mounted unit

FTXC-B + RXC-B



sensira

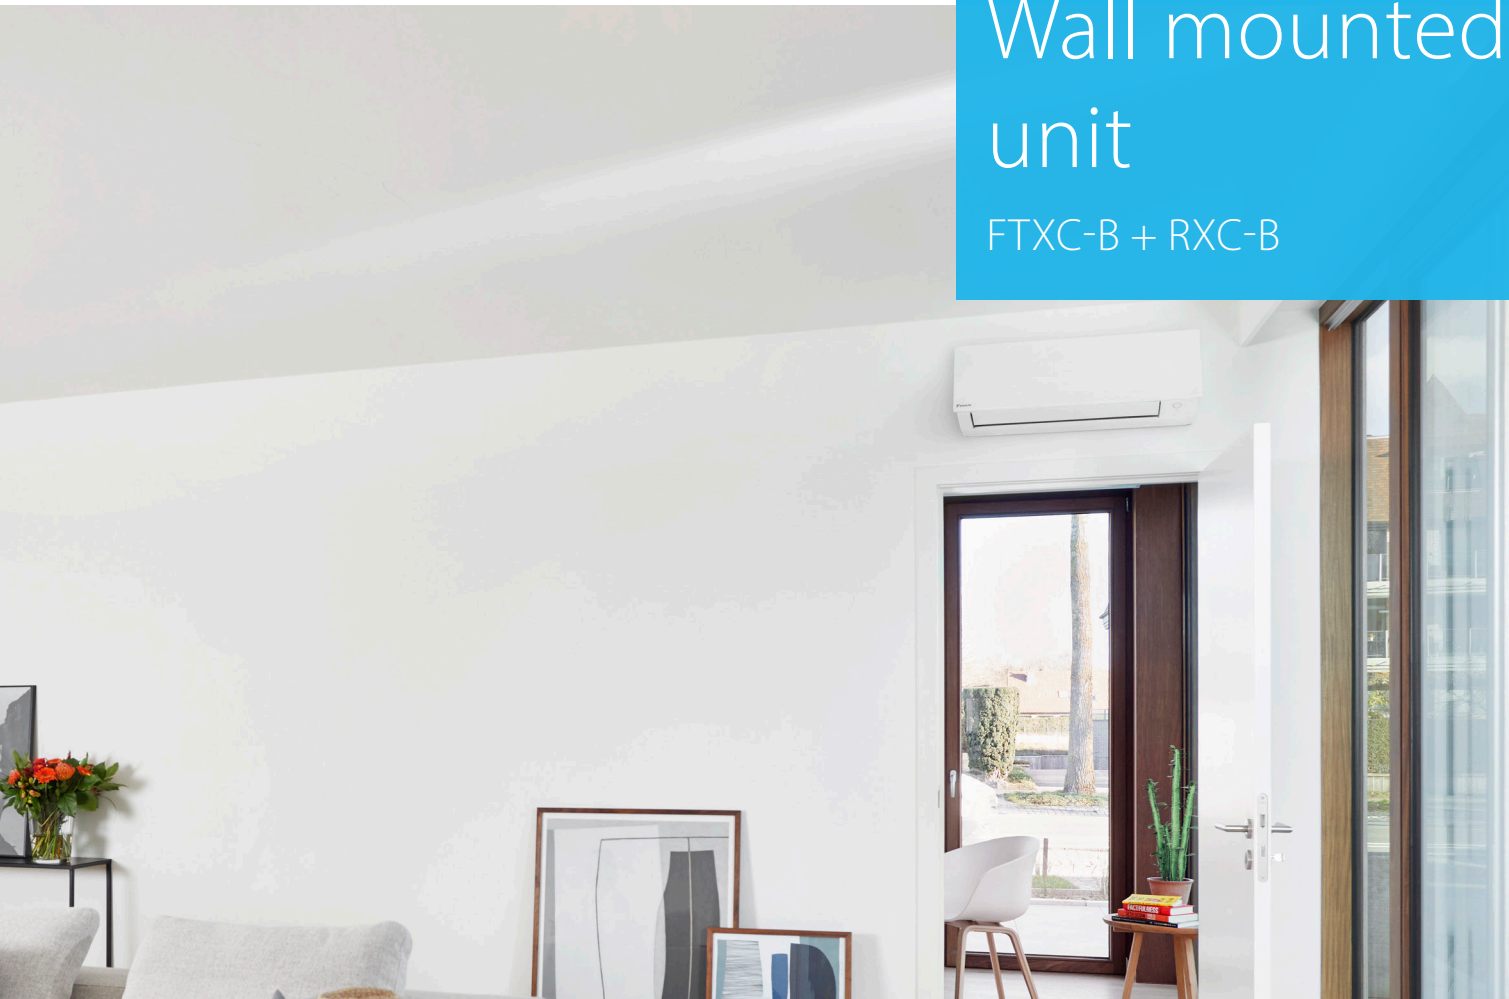

Energy saving during standby mode



Online controller via app

Wall mounted unit, offering good value for money

- › Flat, stylish front panel blends easily within any interior décor and is easier to clean
- › Online controller (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption
- › Seasonal efficiency values up to A++ in cooling
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency

FTXC-B + RXC-B




Efficiency data		FTXC + RXC	20B + 20B	25B + 25B	35B + 35B	50B + 50B	60B + 60B	71B + 71B	
Cooling capacity	Min./Max.	kW	1.3/3.0		1.3/4.0	1.4/6.2	1.8/7.0	2.3/7.3	
Heating capacity	Min./Max.	kW	1.30/4.00		1.30/4.80	1.36/6.60	1.48/8.00	2.30/9.00	
Power input	Cooling	Min./Nom./Max.	0.30/0.595/1.15	0.30/0.765/1.15	0.32/1.05/1.74	0.30/1.55/2.11	0.38/1.89/2.05	0.44/2.38/2.54	
	Heating	Min./Nom./Max.	0.28/0.670/1.35	0.28/0.750/1.35	0.28/1.07/1.57	0.27/1.52/1.85	0.33/1.68/2.35	0.50/2.46/2.74	
Space cooling	Energy efficiency class		A++						
	Capacity	Pdesign	kW	2.08	2.57	3.44	5.08	6.21	6.96
	SEER			6.89	6.84	6.87	6.45	6.40	5.30
Annual energy consumption		kWh/a	106	132	175	276	340	459	
Space heating (Average climate)	Energy efficiency class		A+						
	Capacity	Pdesign	kW	1.87	2.23	2.24	3.90	4.10	6.35
	SCOP/A			4.40	4.45	4.28	4.42	4.24	3.81
	Annual energy consumption		kWh/a	594	700	732	1,236	1,354	2,334
Nominal efficiency	EER		3.36	3.35		3.29	3.30	2.98	
	COP		3.73	3.79	3.74	3.71	3.81	3.25	
	Energy labeling Directive		Cooling/Heating	A/A					

Indoor unit		FTXC	20B	25B	35B	50B	60B	71B	
Dimensions	Unit	HeightxWidthxDepth	288x785x250				297x1,010x288		
Weight	Unit	kg	9.00		9.50		13.0		
Air filter	Type		Removable / washable						
Fan	Air flow rate	Cooling	5.4/6.5/9/10.8			7.4/8.2/10/12.2		10.2/13.6/16/20.4	
Sound power level	Cooling		54		55		57		
Sound pressure level	Cooling	Silent operation/Low/High	20/26/38		21/26/39		29/33/45		
Control systems	Infrared remote control		BRC52B66						
	Wired remote control		-						
Power supply	Phase/Frequency/Voltage		1~/50/220-240						

Outdoor unit		RXC	20B	25B	35B	50B	60B	71B	
Dimensions	Unit	HeightxWidthxDepth	550x658x273			615x845x300		695x930x350	
Weight	Unit	kg	24.0		26.0		39.0		
Sound power level	Cooling		58		60		65		
Sound pressure level	Cooling	High	45		46		51		
Operation range	Cooling	Ambient	Min.-Max.		10~46		-10~46		
	Heating	Ambient	Min.-Max.		-15~18				
Refrigerant	Type		R-32						
	GWP		675.0						
	Charge	kg/TCO2Eq	0.550/0.371		0.750/0.506		1.00/0.675		
Piping connections	Liquid	OD	mm		64				
	Gas	OD	mm				12.7		
	Piping	OU - IU	Max.	m		20		30	
	length	System	Chargeless	m		8			
	Additional refrigerant charge		kg/m	0,017 (for piping length exceeding 7.5m)					
Level difference	IU - OU	Max.	m		15.0		20.0		
Power supply	Phase/Frequency/Voltage		1~/50/220-240						
Current - 50Hz	Maximum fuse amps (MFA)		A		16		20		

Daikin Europe N.V. · goliat.d@daikineurope.com · 0 0 · Poland · 0 0 · 0 (Responsible Editor)



ECPEN19-045

03/2019

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

