

# SRK71ZR-W / SRC71ZR-W

7.1 (2.3~7.8)

Indoor Unit : SRK71ZR-W

Outdoor Unit : SRC71ZR-W

R32

## **Specifications**

Indoor unit				SRK71ZR-W	
Outdoor unit	utdoor unit			SRC71ZR-W	
Power source				1Phase, 220 - 240, 50Hz	
Nominal cooling capacity (Min~Max)		kW	7.1 (2.3~7.8)		
Nominal heating capac	ity (Min~Max)		kW	8.0 (2.0~10.8)	
Power consumption		Cooling/Heating	kW	1.93 / 1.95	
EER/COP		Cooling/Heating		3.68 / 4.10	
Max. running current			A	17	
Sound power	Indoor	Cooling/Heating		57 / 60	
level	Outdoor	Cooling/Heating		63 / 63	
	Indeer	Cooling (Hi/Me/Lo/Ulo)	dB(A)	44 / 41 / 37 / 25	
Sound pressure level	Indoor	Heating (Hi/Me/Lo/Ulo)		46 / 39 / 35 / 28	
	Outdoor Cooling/Heating 53 / 51	53 / 51			
		Cooling (Hi/Me/Lo/Ulo)		20.5 / 18.6 / 16.2 / 10.4	
Air flow	Indoor	Heating (Hi/Me/Lo/Ulo)	m3/min	25.0 / 19.8 / 17.3 / 13.3	
	Outdoor	Cooling/Heating		55 / 43.5	
Extenies Disconsister	Indoor			339 x 1197 x 262	
Exterior Dimensions	Outdoor	Height x Width x Depth	mm	750 x 880(+88) x 340	
Net weight	Indoor / Out	door	kg	15.5 / 56.0	
Refrigerant		Type/GWP		R32 / 675	
Refrigerant		Charge	kg/TCO2Eq	1.5 / 1.013	
Refrigerant piping size		Liquid/Gas	ø mm	6.35(1/4") / 15.88(5/8")	
Refrigerant line (one wa	ay) length		m	Max. 30	
Vertical height differen	ces	Outdoor is higher/lower	m	Max. 20 / Max. 20	
Outdoor operating		Cooling	°C	-15~46	
temperature range		Heating		-15~24	
Clean filter				Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1	
Energy Class (Cooling/Heating)				A++/A+	
SEER				7.40	
SCOP (Average climate)				4.50	
Pdesign (cooling/heatin	g(@-10°C))		kW	7.10/6.60	
Annual Electricity Consumption (cooling/heating)			kWh/a	337/2055	
Designated Heating Season			Average		


• The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. • Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

• 'tonne(s) of CO2 equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential. \*SEER/SCOP are based on EN14825:2016 and Commission regulation (EU) No.2016/2281


(Service spo

## **Schematics**

### SRK63ZR-W SRK71ZR-W SRK80ZR-W SRK63ZR-S SRK71ZR-S SRK80ZR-S SRK100ZR-S

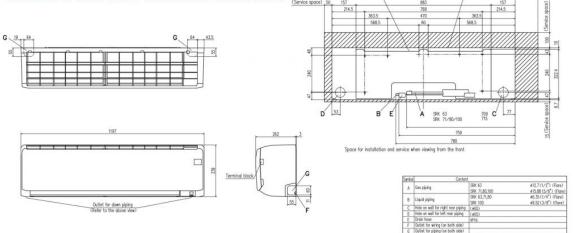

#### SRC71ZR-W SRC80ZR-W SRC71ZR-S SRC80ZR-S



Ι
1
Т
T
T
1

Symbol	Content				
A	Service valve connection (gas side)	\$15.88 (5/8") (Flare)			
В	Service valve connection (liquid side)	\$6.35 (1/4") (Flare)			
С	Pipe/cable draw-out hole				
D	Drain discharge hole	\$20 x 3 places			
E	Anchor bolt hole	M10 x 4 places			

ion plat

Minimum	installation	space

Examples of Installation Xmensions	T	п	н	
L1	Open	Open	500	
L2	300	250	Open	
L3	100	150	100	
L4	250	250	250	

