

ROTENSO[®]
Live better



COMFORTKLIMAAT





Versu Mirror

Wall-mounted air conditioner

Versu Mirror wall-mounted air conditioner represents a new version of the iconic premium model in the Rotenso air conditioner lineup. Its aesthetics are defined by a dark graphite housing with a softly iridescent finish, creating an intriguing visual effect. The front of the air conditioner is adorned with a striking dark mirror sheet.

The new Versu Mirror retains its distinctive and unusual shape, while featuring a reduced body depth and slightly softer lines. Graphite colour Versu Mirror is impressing with its design, additionally cares about the air quality.

The Versu Mirror air conditioner incorporates various filters and the iAIR Super Ioniser, effectively





VERSU MIRROR



Luxurious front panel



Remarkably low noise emission of 19 dB



Automatic 4D louvres



Rotating louvre 180°



Super ionizer iAIR



Heating at low outdoor temp. down to -22°C



eliminating harmful gases, viruses, bacteria, dust mites, and allergens from the air. This purification process has a positive impact on the well-being of users in the air-conditioned room.

The built-in humidity sensor allows for monitoring essential air parameters for overall well-being and health. With its high capacity in heating mode and year-round package, including a drip tray heater and compressor crankcase heater, the Versu Mirror can easily operate even at extremely low outside

temperatures down to -22°C. The air conditioner releases air in a gentle cascading manner, thanks to its 180° rotating louvre and the ability to control all louvres.

The SMART Wi-Fi modem enables convenient control of the air conditioner from anywhere via a user-friendly mobile app.

Versu Mirror elegant design appeals to discerning customers and interior designers.



Silent operation
at only 19 dB

Remarkably low **noise emission of 19 dB**

The unit supports ultra silent eMoto mode for undisturbed rest.



Heating at outdoor temperature as low as -22°C

The technology applied and the integrated winter package empower the air conditioner to operate efficiently, even in harsh weather conditions. The air conditioner provides heating efficiency even at low outdoor temperatures.



Automatic 4D louvres

Inclusion of automatic 4D louvres with built-in actuators enables convenient control of both vertical and horizontal louvres via remote control or wall-mounted controller. This ensures maximum comfort during operation and guarantees efficient air distribution throughout the room.



Luxurious front panel

The air conditioner boasts about of dark, graphite gently opalescent housing that is elegantly finished with a sheet of dark mirror. This design element contributes to a modern and sophisticated aesthetic.



Rotating louvre 180°

The horizontal rotating louvre provides precise airflow in any direction within a 180° vertical range.



Super Ionizer iAIR

By generating negative oxygen ions, the Super Ionizer iAIR effectively eliminates viruses, bacteria, dust mites, and allergens from the air. Unpleasant odours are swiftly removed upon contact with the ionizer, leaving the environment fresh and healthy.

Versu Mirror [R15]

2,6-5,3 kW



Unit features



Digital DC Inverter SKY[®]



Automatic purification iClean⁽¹⁾



Super Ionizer iAIR



3-in-1 (Si.Ion + Photocat. + Nano) iAIR filter⁽¹⁾



Antibacterial HEPA iAIR filter



Electrostatic HD iAIR filter



Super Silent eMOTO mode⁽¹⁾



Automatic 4D louvres



Rotating louvre 180°



Turbo eMOTO mode⁽¹⁾



Upper cascade air supply



Lower cascade air supply



Air supply eMOTO control system



Eco eMOTO mode⁽¹⁾



Wide-angle eMOTO air supply



Humidity sensor⁽¹⁾⁽³⁾



Wired controller SMART port⁽²⁾



SMART wi-fi



SMART panel display ON/OFF



SMART Follow mode



Wireless remote control



Wired controller⁽²⁾



SMART heating to 8°C⁽¹⁾



Louvre setting memory



1W standby mode⁽¹⁾



Auto restart memory



Anti-corrosive gold fins



Drip tray heater



Compressor crankcase heater



Silence mode



Timer



Cooling at low outdoor temp down to -15°C



Heating at low outdoor temp. down to -22°C⁽¹⁾



Double-sided condensate drainage



Self-diagnostics



Sleep mode



BMS Modbus⁽²⁾



BMS Bacnet⁽²⁾

1. Feature not available in Multi Split system. 2. Feature is only optional. 3. Feature can be accessed via mobile app.

* Silver Ion + Photocatalytic + Cold Nano

Technical specification

Model			Versu Mirror 2,6 kW	Versu Mirror 3,5 kW	Versu Mirror 5,3 kW	
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (1231-3297)	3516 (1320-4307)	5275 (1817-6008)
Rated input		Nom. (Min. - Max.)	W	600 (100-1260)	900 (130-1650)	1600 (140-2300)
Operating current		Nom. (Min. - Max.)	A	2,6 (0,4-5,5)	3,9 (0,6-7,2)	7,0 (0,6-10,0)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (847-3722)	3809 (879-4395)	5568 (1260-6154)
Rated input		Nom. (Min. - Max.)	W	623 (110-1320)	950 (120-1500)	1680 (220-2350)
Operating current		Nom. (Min. - Max.)	A	2,7 (0,5-5,7)	4,1 (0,5-6,5)	7,3 (1,0-10,2)
Reversible heat pump type				air-to-air	air-to-air	air-to-air
Design load in cooling mode			kW	2,6	3,5	5,3
SEER			W/W	8,8	8,5	6,3
Energy efficiency class, cooling				A+++	A+++	A++
Annual electric energy consumption, cooling			kWh/a	103	146	294
Design load in heating mode (T _{biv} -7°C)			kW	2,5	2,5	4,1
SCOP			W/W	4,6	4,6	4,1
Energy efficiency class, heating				A++	A++	A+
Annual electric energy consumption, heating			kWh/a	776	776	1430
Dehumidification			l/h	1,0	1,2	1,8
Maximum energy consumption			W	2200	2200	2500
Maximum operating current			A	9,6	9,6	10,9
Indoor unit			VM26Xi R15	VM35Xi R15	VM50Xi R15	
EAN product code			5905567600890	5905567600913	5905567600937	
Fan speed	T / H / M / L / ML / S	rpm	1122 / 910 / 823 / 710 / 652 / 600	1122 / 910 / 823 / 710 / 652 / 600	1150 / 970 / 880 / 800 / 760 / 670	
Air flow	T / H / M / L / ML / S	m ³ /h	700 / 555 / 445 / 380 / 270 / 230	700 / 555 / 445 / 380 / 270 / 230	750 / 590 / 490 / 410 / 330 / 280	
Sound pressure level	T / H / M / L / ML / S	dB(A)	40 / 32 / 27 / 24 / 21 / 19	40 / 32 / 27 / 24 / 21 / 19	41 / 36 / 30 / 28 / 24 / 19	
Sound power level		dB(A)	53	53	54	
Rated input		W	13	13	34	
Operating current		A	0,1	0,1	0,1	
Net dimensions	W × D × H	mm	920 × 211 × 321	920 × 211 × 321	920 × 211 × 321	
Gross dimensions	W × D × H	mm	1005 × 295 × 385	1005 × 295 × 385	1005 × 295 × 385	
Net weight / Gross weight		kg	11,3 / 14,2	11,3 / 14,2	11,5 / 14,4	
Condensate drain		mm	16	16	16	
Outdoor unit			VM26Xo R15	VM35Xo R15	VM50Xo R15	
EAN product code			5905567600906	5905567600920	5905567600944	
Fan speed	H / M / L	rpm	800 / 620 / 450	800 / 620 / 450	760 / 650 / 490	
Maximum air flow		m ³ /h	2200	2200	2100	
Sound pressure level		dB(A)	53	53	54	
Sound power level		dB(A)	58	62	63	
Net dimensions	W × D × H	mm	765 × 303 × 555	765 × 303 × 555	805 × 330 × 554	
Gross dimensions	W × D × H	mm	887 × 337 × 610	887 × 337 × 610	915 × 370 × 615	
Bracket spacing	W × D	(mm)	452 × 286	452 × 286	511 × 317	
Net weight / Gross weight		kg	26,4 / 28,8	26,4 / 28,8	33,5 / 36,1	
Refrigerant	Type		R32	R32	R32	
	GWP		675	675	675	
	≤ 5m	kg	0,7	0,7	1,1	
		TCO ₂ eq	0,47	0,47	0,74	
Charged > 5m	g/mb	12	12	12		
Pipe connections	Liquid/Gas	mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")	Φ6,35 / Φ9,52 (1/4" / 3/8")	Φ6,35 / Φ12,7 (1/4" / 1/2")	
Maximum installation length		m	25	25	30	
Maximum height difference		m	10	10	20	
Compressor type			Rotary DC	Rotary DC	Rotary DC	
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f	220-240-50, 1f	
Electrical protection			A	C10	C16	
Power cables: outdoor unit			pcs × mm ²	3 × 1,5	3 × 1,5	
Control and power cables: indoor unit - outdoor unit			pcs × mm ²	5 × 1,5	5 × 2,5	
Control and power cables: hiro unit - indoor unit			pcs × mm ²	4 × 1,5	4 × 1,5	
Indoor operating range (cooling / heating)			°C	16~32 / 0~30	16~32 / 0~30	
Outdoor operating range (cooling / heating)			°C	-15~50 / -22~30	-15~50 / -22~30	
Compatible systems						
1:1 SINGLE				•		
1:2 DUAL						
1:X MULTI				•		



Versu Pure

Wall-mounted air conditioner

Versu Pure is a new version of the Versu model, which is widely recognized and favoured by aesthetes.

Its unique and elegantly designed appearance appeals to enthusiasts of various styles.

Versu Pure showcases a sleek form that captures attention. The original body design remains faithful to its predecessors in the Versu family.

The white and discreet silver trims along the soft edges of the air conditioner's front panel align with contemporary design trends.





VERSU PURE



SMART
wi-fi



Remarkably low
noise emission
19 dB



Automatic 4D
louvres




Rotating louvre
180°



Super
Ionizer iAIR




Heating at low
outdoor temp.
down to -22°C

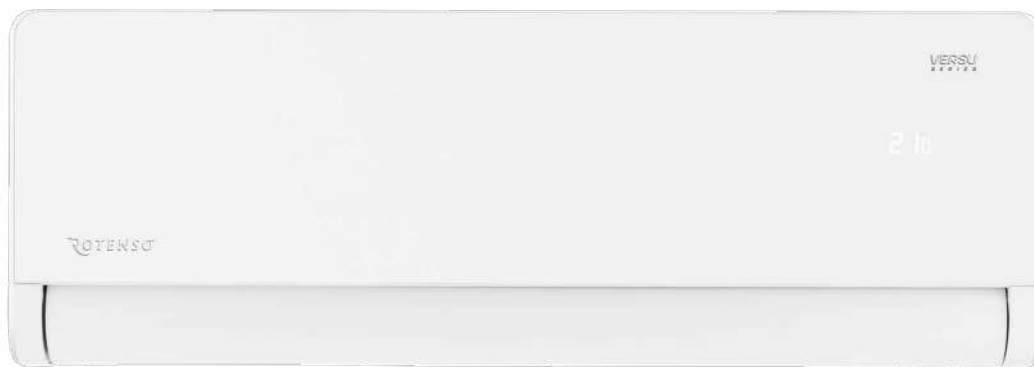

Cascade air supply, achieved through a horizontal louvre rotating 360 degrees around its axis, ensures direct vertical air distribution.

With its quiet operation of only 19 dB, this highly efficient appliance offers advanced air purification

capabilities, making it ideal for year-round use. It boasts about of the highest cooling energy efficiency class A+++.

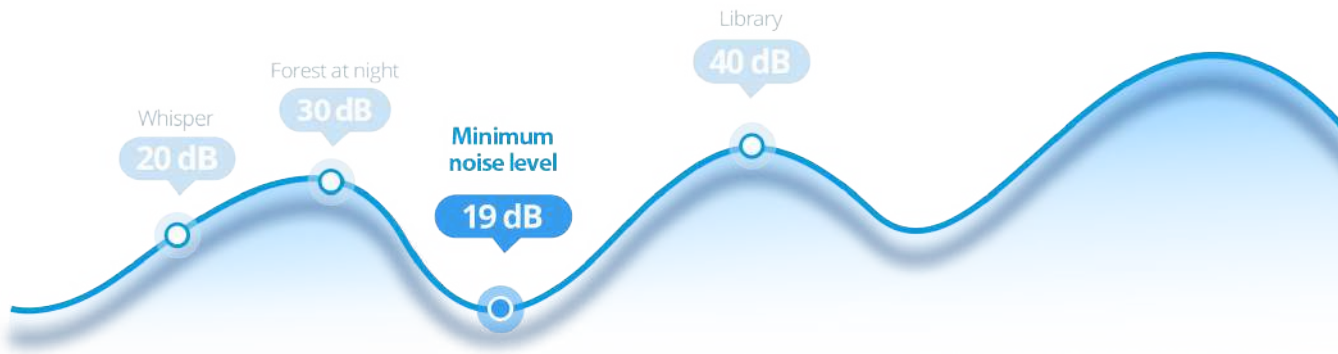

Remarkably low **noise emission of 19 dB**

The unit supports ultra silent eMoto mode for undisturbed rest.



SMART wi-fi

With the help of SMART Wi-Fi and a Wi-Fi modem, the appliance can be conveniently controlled using a tablet or smartphone from both within and outside the house.



Super Ionizer iAIR

By generating negative oxygen ions, the Super Ionizer iAIR effectively eliminates viruses, bacteria, dust mites, and allergens from the air. Unpleasant odours are swiftly removed upon contact with the ionizer, leaving the environment fresh and healthy.



Rotating louvres 180°

The horizontal rotating louvre provides precise airflow in any direction within a 180° vertical range.



Heating at low outdoor temperature down to -22°C

The technology applied and the integrated year-round package empower the air conditioner to operate efficiently, even in harsh weather conditions. The air conditioner provides heating efficiency even at low outdoor temperatures.



Automatic 4D louvres


Inclusion of automatic 4D louvres with built-in actuators enables convenient control of both vertical and horizontal louvres via remote control or wall-mounted controller. This ensures maximum comfort during operation and facilitates efficient air distribution throughout the room.

Versu Pure

2,6-5,3 kW



- SCOP 4,6
- Wi-Fi
- 22°C
- 4-way air supply
- Coil icon
- Coil icon
- 5 year WARRANTY
- PZH CERTIFICATE

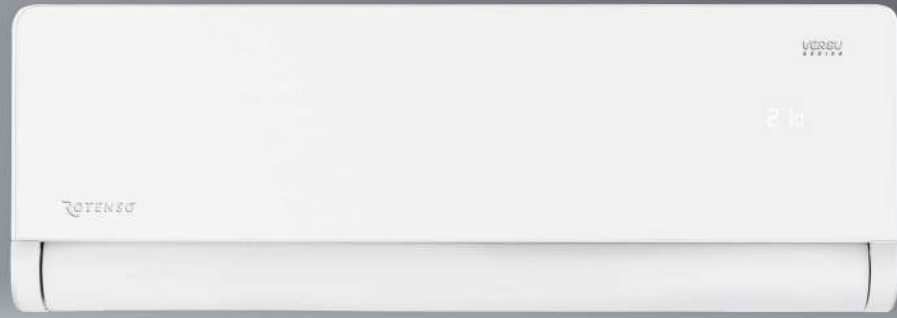

Unit features



Digital DC Inverter SKY[®]



Automatic purification iClean⁽¹⁾



Super Ionizer iAIR



3-in-1 (Si.Ion + Photocat. + Nano) iAIR filter⁽²⁾



Antibacterial HEPA iAIR filter



Electrostatic HD iAIR filter



Super Silent eMOTO mode⁽¹⁾



Automatic 4D louvres



Rotating louvre 180°



Turbo eMOTO mode⁽¹⁾



Upwards cascade air supply



Downwards cascade air supply



Air supply eMOTO control system



Eco eMOTO mode⁽¹⁾



Wide-angle eMOTO air supply



Humidity sensor⁽¹⁾⁽³⁾



Wired controller SMART port⁽²⁾



SMART wi-fi



SMART panel display ON/OFF



SMART Follow mode



Wireless remote control



Wired controller⁽²⁾



SMART heating to 8°C⁽¹⁾



Louvre setting memory



1W standby mode⁽¹⁾



Auto restart memory



Anti-corrosive gold fins



Drip tray heater



Compressor crankcase heater



Silence mode



Timer



Cooling at low outdoor temp down to -15°C



Heating at low outdoor temp. down to -22°C⁽¹⁾



Double-sided condensate drainage



Self-diagnostics



Sleep mode



BMS Modbus⁽²⁾



BMS Bacnet⁽²⁾

1. Feature not available in Multi Split system. 2. Feature is only optional. 3. Feature can be accessed via mobile app.

* Silver Ion + Photocatalytic + Cold Nano

Technical specification

Model				Versu Pure 2,6 kW	Versu Pure 3,5 kW	Versu Pure 5,3 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (1231-3297)	3516 (1320-4307)	5275 (1817-6008)
Rated input		Nom. (Min. - Max.)	W	600 (100-1260)	900 (130-1650)	1600 (140-2300)
Operating current		Nom. (Min. - Max.)	A	2,6 (0,4-5,5)	3,9 (0,6-7,2)	7,0 (0,6-10,0)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (847-3722)	3809 (879-4395)	5568 (1260-6154)
Rated input		Nom. (Min. - Max.)	W	623 (110-1320)	950 (120-1500)	1680 (220-2350)
Operating current		Nom. (Min. - Max.)	A	2,7 (0,5-5,7)	4,1 (0,5-6,5)	7,3 (1,0-10,2)
Reversible heat pump type				air-to-air	air-to-air	air-to-air
Design load in cooling mode			kW	2,6	3,5	5,3
SEER			W/W	8,8	8,5	6,3
Energy efficiency class, cooling				A+++	A+++	A++
Annual electric energy consumption, cooling			kWh/a	103	146	294
Design load in heating mode (T _{biv} -7°C)			kW	2,5	2,5	4,1
SCOP			W/W	4,6	4,6	4,1
Energy efficiency class, heating				A++	A++	A+
Annual electric energy consumption, heating			kWh/a	776	776	1430
Dehumidification			l/h	1,0	1,2	1,8
Maximum energy consumption			W	2200	2200	2500
Maximum operating current			A	9,6	9,6	10,9
Indoor unit				VP26Xi	VP35Xi	VP50Xi
EAN product code				5905567600951	5905567600975	5905567600999
Fan speed	T / H / M / L / ML / S		rpm	1122 / 910 / 823 / 710 / 652 / 600	1122 / 910 / 823 / 710 / 652 / 600	1150 / 970 / 880 / 800 / 760 / 670
Air flow	T / H / M / L / ML / S		m ³ /h	700 / 555 / 445 / 380 / 270 / 230	700 / 555 / 445 / 380 / 270 / 230	750 / 590 / 490 / 410 / 330 / 280
Sound pressure level	T / H / M / L / ML / S		dB(A)	40 / 32 / 27 / 24 / 21 / 19	40 / 32 / 27 / 24 / 21 / 19	41 / 36 / 30 / 28 / 24 / 19
Sound power level			dB(A)	53	53	54
Rated input			W	13	13	34
Operating current			A	0,1	0,1	0,1
Net dimensions		W × D × H	mm	920 × 211 × 321	920 × 211 × 321	920 × 211 × 321
Gross dimensions		W × D × H	mm	1005 × 295 × 385	1005 × 295 × 385	1005 × 295 × 385
Net weight / Gross weight			kg	11,3 / 14,2	11,3 / 14,2	11,5 / 14,4
Condensate drain			mm	16	16	16
Outdoor unit				VP26Xo	VP35Xo	VP50Xo
EAN product code				5905567600968	5905567600982	5905567601002
Fan speed	H / M / L		rpm	800 / 620 / 450	800 / 620 / 450	760 / 650 / 490
Maximum air flow			m ³ /h	2200	2200	2100
Sound pressure level			dB(A)	53	53	54
Sound power level			dB(A)	62	62	63
Net dimensions		W × D × H	mm	765 × 303 × 555	765 × 303 × 555	805 × 330 × 554
Gross dimensions		W × D × H	mm	887 × 337 × 610	887 × 337 × 610	915 × 370 × 615
Bracket spacing		W × D	(mm)	452 × 286	452 × 286	511 × 317
Net weight / Gross weight			kg	26,4 / 28,8	26,4 / 28,8	33,5 / 36,1
Refrigerant	Type			R32	R32	R32
	GWP			675	675	675
	≤ 5m		kg	0,7	0,7	1,1
			TCO ₂ eq	0,47	0,47	0,74
Charged > 5m			g/mb	12	12	12
Pipe connections		Liquid/Gas	mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")	Φ6,35 / Φ9,52 (1/4" / 3/8")	Φ6,35 / Φ12,7 (1/4" / 1/2")
Maximum installation length			m	25	25	30
Maximum height difference			m	10	10	20
Compressor type				Rotary DC	Rotary DC	Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f	220-240-50, 1f	220-240-50, 1f
Electrical protection			A	C10	C10	C16
Power cables: outdoor unit			pcs × mm ²	3 × 1,5	3 × 1,5	3 × 2,5
Control and power cables: indoor unit - outdoor unit			pcs × mm ²	5 × 1,5	5 × 1,5	5 × 2,5
Control and power cables: hiro unit - indoor unit			pcs × mm ²	4 × 1,5	4 × 1,5	4 × 1,5
Indoor operating range (cooling / heating)			°C	16-32 / 0-30	16-32 / 0-30	16-32 / 0-30
Outdoor operating range (cooling / heating)			°C	-15-50 / -22-30	-15-50 / -22-30	-15-50 / -22-30
Compatible systems						
1:1 SINGLE					●	
1:2 DUAL						
1:X MULTI					●	